



# Component details & available options

## Stair climbing, battery powered appliance truck component details

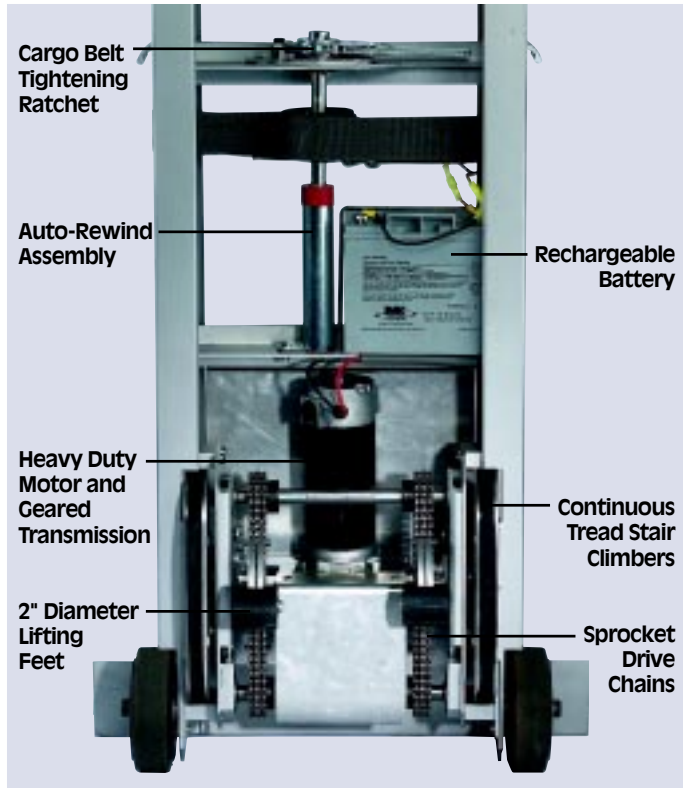

**Superwheel attachment.** Installs in seconds. Equipped with 10" x 4" full pneumatic tires. Provides 4 wheel support and eases transport over rough surfaces.

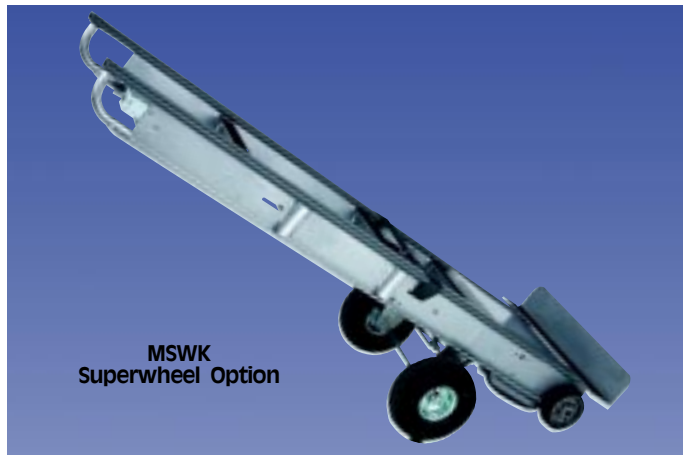

**Optional aluminum winch lift attachment** has 800 lb capacity. 3-1/2" Jarvis Advantage® swivel casters for 4 wheel support and mobility. Winch equipped with auto-braking system. 18" forks, adjustable width up to 19" outside dimension. 58" lift height. **Factory or field installation.**

**Toe plate extension.** Easily clips on to standard toe plate and provides 12" deep x 30" wide cargo surface.

**Platform attachment.** Slides in place over winch lift forks to provide a 20" x 20" lifting platform.



Model	Part	Weight	Capacity	Dimensions		
				Width	Height	Depth
<b>Aluminum winch lift attachment*</b>						
WLF	230053	67 lbs	800 lbs	25 "	70 "	30 "
<b>Steel nose extension</b>						
NE-28	230055	18 lbs		28 "	4 "	12 "
<b>Steel slip on platform</b>						
SP-20	260160	20 lbs		20 "	7 "	20 "
<b>Superwheel option</b>						
MSWK	270076	19 lbs		11.5 "	4.5 "	20.5 "

\*can be factory or field installed

**WESCO®**  
Industrial Products, Inc.

P.O. Box 47, Lansdale, PA 19446-0047

Phone: 215-699-7031 • Fax: 215-699-3836

<http://www.wescomfg.com>

**WESCO**<sup>®</sup>

Manufacturers of material handling equipment since 1948

**New!**

# Wesco **StairKing** Battery Powered Stair Climbing Appliance Truck



PATENT PENDING



Wesco's state of the art battery-powered stairclimbing trucks have standard features not available on competitor models.

- 1/2 Horsepower, 50 amp, high torque motor runs cooler under load and gets over **80% more lifts** per charge.
- Industrial grade gear box transmits steady power and is preferable to other drive designs.
- Large 2" diameter, polyurethane lifting feet provide more secure stair gripping.
- Auto rewind ratchet works first to take the slack out of the cargo belt, and then provides a ratchet crank to securely tighten the load.
- Noseplate measures 24" by 4" deep.
- Sealed maintenance-free battery. Charger and circuit breaker included.
- Heavy-duty I beam construction. Custom lightweight alloy frame.
- 6" mold-on rubber wheels
- See component details and available options on reverse.

**Available in two heights: 66" and 72"**

Model	Part	Weight	Capacity	Dimensions		
				Width	Height	Depth
DC-66	230051	101 lbs	850 lbs	19"	66"	15"
DC-72	230052	102 lbs	850 lbs	19"	72"	15"

